

# NIO-4SDSQ

## 4" Iolite Square Adjustable Reflector with Square Aperture

Source: 14W to 24W LED  
800lm to 2000lm

Type

Project

Catalog No.

Notes

### PRODUCT DESCRIPTION

4" Iolite LED downlights require a dedicated Iolite new construction or remodel housing. Die-cast adjustable reflectors optimize visual cut-off and adjustable to aim the light source in desired direction.

### FEATURES

- 800lm, 1000lm, 1500lm or 2000lm LED packages
- 2700K, 3000K, 3500K, 4000K, 5000K @ 90+ CRI
- Comfort Dim (warm dimming) also available in 800lm only
- Flood optic, narrow flood and spot optics (included)
- 5-Year limited warranty

### SPECIFICATION

**Construction:** Trims are constructed of heat dissipating, die-cast aluminum. The aluminum die-cast LED heat sink is threaded to fit the trim and transfer heat.

**Mounting:** Luminaire includes friction blades to mount securely to housing.

### OPTICS

**800-1000lm:** Three field changeable optics (spot, narrow flood and flood) are included with each LED module. Premium 10° TIR narrow spot optic assembly also available ([Click Here](#) for more information). Optional frosted and TIR optics are also available.

**1500-2000lm:** Three field changeable TIR optics (spot, narrow flood and flood) are included with each LED module.

### ELECTRICAL

**Lumens / Wattage:** 800lm / 14W, 1000lm / 14W, 1500lm / 20W, 2000lm / 24W

**Color Temperature:** 2700K, 3000K, 3500K, 4000K, 5000K

**Color Rendering Index:** 90+ CRI

**Operating Temperature:** Specified by housing

**Lifetime:** 50,000 hours @ L70

**Comfort Dim:** Comfort Dim color tunes the temperature from a bright 3100K, to a romantic and comfortable 2000K on a gradual, even curve. Available in 800lm only.

**Dimming:** Specified by housing

### COMPATIBLE HOUSINGS

Luminaires are compatible with respective Iolite housings manufactured by Nora Lighting.

| CATALOG NO.                   | DESCRIPTION           | LUMENS / WATTAGE |
|-------------------------------|-----------------------|------------------|
| <a href="#">NHIOICD-48</a>    | ICAT New Construction | 800-1000lm / 14W |
| <a href="#">NHIOICDCP-48</a>  | Chicago Plenum        | 800-1000lm / 14W |
| <a href="#">NHRIOIC-48</a>    | ICAT Remodel          | 800-1000lm / 14W |
| <a href="#">NHIOICD-415</a>   | ICAT New Construction | 1500lm / 20W     |
| <a href="#">NHIOICDCP-415</a> | Chicago Plenum        | 1500lm / 20W     |
| <a href="#">NHIOICD-420</a>   | ICAT New Construction | 2000lm / 24W     |
| <a href="#">NHIOICDCP-420</a> | Chicago Plenum        | 2000lm / 24W     |


**Accessories:** Reflectors will accommodate (1) hex louver and (1) translucent deco collar or opaque snoot, no accessory holder is required, see accessories page. Flush mount mud ring is available to give the appearance of a trimless reflector, compatible with new construction housing only.

### LABELS AND LISTINGS

- cULus Listed for Damp Locations
- ENERGY STAR certified
- [5-Year Limited Warranty](#)
- RoHS Compliant
- Certified to the high efficacy requirements of California Title 24 JA8-2019



### PRODUCT IMAGES & DIMENSIONS



#### NIO-4SDSQ

Square Adjustable Reflector with Square Aperture

Adjustability:

New Construction: 38° / Remodel: 20°




**BB**  
Black Reflector  
Black Flange



**BW**  
Black Reflector  
White Flange



**BZ**  
Bronze Reflector  
Bronze Flange



**CHMPW**  
Champagne Haze Reflector  
Matte Powder White Flange



**HW**  
Haze Reflector  
White Flange



**HZMPW**  
Haze Reflector  
Matte Powder White Flange



**MPW**  
Matte Powder White Reflector  
Matte Powder White Flange



**WW**  
White Reflector  
White Flange

### 4" Iolite Square Adjustable Reflector with Square Aperture - Dedicated Housing Required

| Reflector Type   | Color Temp.                    | Finish                                 | Lumens / Wattage   |
|--|--------------------------------|--|--|
| NIO-4SDSQ = Square Adjustable Reflector with Square Aperture | 50X = 5000K*                   | BB = Black / Black                     | (blank) = 800lm / 14W  |
|  | CDX = Comfort Dim <sup>†</sup> | BW = Black / White                     |  |
|  | 27X = 2700K                    | BZ = Bronze / Bronze                   | /10 = 1000lm / 14W<br>/HL = 1500-2000lm<br>(varies by housing) |
|  | 30X = 3000K                    | CHMPW = Champagne / Matte Powder White |  |
|  | 35X = 3500K                    | HN = Haze / Natural Metal              |  |
|  | 40X = 4000K                    | HW = Haze / White                      |  |
|  | 50X = 5000K                    | HZMPW = Haze / Matte Powder White      |  |
|  |                                | MPW = Matte Powder White               |  |
|  |                                | WW = White / White                     |  |

\* 5000K LED modules in 800lm are while supplies last

<sup>†</sup> Comfort Dim available in 800lm only and 1" Iolite uses a different dimming curve than 2" & 4" Iolite

### Compatible Housings

| Housing Type  |
|---|
| NHIOICD-48 = ICAT New Construction / 800-1000lm / 14W |
| NHIOICDCP-48 = Chicago Plenum / 800-1000lm / 14W      |
| NHRIOIC-48 = ICAT Remodel / 800-1000lm / 14W          |
| NHIOICD-415 = ICAT New Construction / 1500lm / 20W    |
| NHIOICDCP-415 = Chicago Plenum / 1500lm / 20W         |
| NHIOICD-420 = ICAT New Construction / 2000lm / 24W    |
| NHIOICDCP-420 = Chicago Plenum / 2000lm / 24W         |

Example: NIO-4SDSQ50XWW = 4" Iolite Square Adjustable Reflector with Square Aperture, 5000K, White finish, 800lm / 14W

# 4" Iolite Accessories


## 4" Iolite Square Adjustable Reflector with Square Aperture

|             |
|-------------|
| Type        |
| Project     |
| Catalog No. |
| Notes       |

### FIELD CHANGEABLE OPTICS

Iolite luminaires include spot, narrow flood and flood optics. Optics can be changed in the field by removing LED module from die-cast trim. Optional frosted and TIR optics are also available.

**Note:** Frosted and Premium TIR optics are not compatible with /HL LED modules.

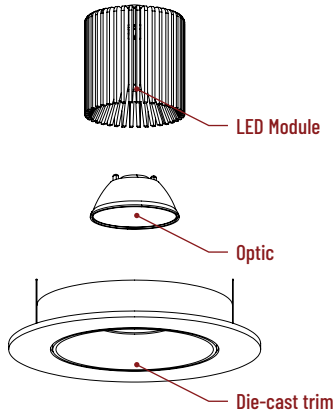

#### Frosted Filter-Optic

**NIO-REFL38FR** 60° Optic  
**NIO-REFL60FR** 73° Optic  
 Not compatible with /HL LED module.

#### Premium TIR Optics

**NIO-REFLTIR15** 22° Optic  
**NIO-REFLTIR25** 26° Optic  
 Not compatible with /HL or Comfort Dim (CDX) LED modules

#### 10° TIR Optic Assembly


Specialized narrow spot LED module assembly is also available. Requires LE4 housing. [Click Here](#) for more information.



### ACCESSORIES

Iolite accessories can be added at any point in the design process. Accessories easily install between LED module and die-cast trim.

Luminaire will accommodate (1) hex louver and (1) collar accessory, no accessory holder required.

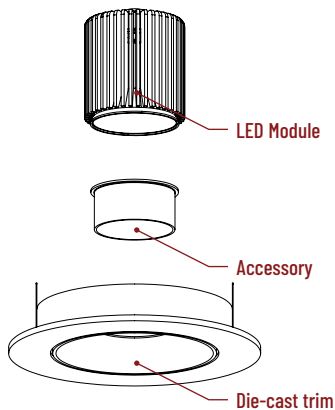

#### Translucent Decorative Collar

**NIO-AS14(color)** 5/8" length  
**NIO-AS19(color)** 3/4" length  
**NIO-AS26(color)** 1" length  
**Color:** AM (amber), BLU (blue), FR (frosted), R (red)  
 Translucent collars color the aperture with the specified color while producing white general light. Collars are available in different lengths. Use to add interest, create a theme, match a theme or define a space.

#### Opaque Collar Snoot

**NIO-AS14(color)** 5/8" length  
**NIO-AS19(color)** 3/4" length  
**NIO-AS26(color)** 1" length  
**Color:** BLK (black), MPW (matte powder white), WH (white)  
 Opaque snoot greatly reduces aperture brightness while preserving light output. (Note: Black snoot will reduce light)

#### Hex Cell Louver

**NIO-HC** Black  
 Hex cell louver subtly reduces aperture brightness by reducing light output by about 20%.

### FLUSH MOUNT

4" Iolite trims can be installed flush with the drywall for a flush mount appearance. A flush mount mud ring is installed after the drywall and a professional drywall finisher floats the ceiling to blend in the mud ring.

#### Flush Mount Mud Ring

**NIO-FMMR-4S** Square Mud Ring

Mounts trim flush to ceiling with flange visible. Mud ring attaches to drywall. **Only for use with NH10ICD-48 or NH10ICDCP-48 new construction housings and NIO-4S reflectors.**  
 Dimensions: 7-7/8" diameter 1/2" thick

